

─ 1 1/4"Ø ASTM F1554 GR. 55 ANCHOR ROD — 1 1/4" HEAVY HEX NUT, ASTM A564 GR. A - 3" X 1/2" THK WASHER ANCHOR BOLT INSTALLATION NOTES: 3000 PSI NON-SHRINK MINIMUM ANCHOR BOLT EMBED AND CONCRETE GROUT BED THICKNESS WILL BE PROVIDED BY RESOLUTE ELEVATOR UPON COMPLETION OF THE TOWER STRUCTURAL DESIGN. — HILTI HIT-RE 500 V3 ANCHOR RODS AND EPOXY DRILLED AND INSTALLED EPOXY OR APPROVED BY OTHERS. **EQUAL**

BASEPLATE, WASHERS, AND NUTS PROVIDED BY AND INSTALLED BY RESOLUTE ELEVATOR.


NUTS IS AVAILABLE FOR PURCHASE FROM

RESOLUTE ELEVATOR.

HARDWARE PACKAGE INCLUDING ANCHOR BOLTS AND

- TYPICAL ANCHOR BOLT INSTALLATION NOT TO SCALE

- 1 - 2100 MRL PIT LEFT HAND 3/4" = 1'-0"

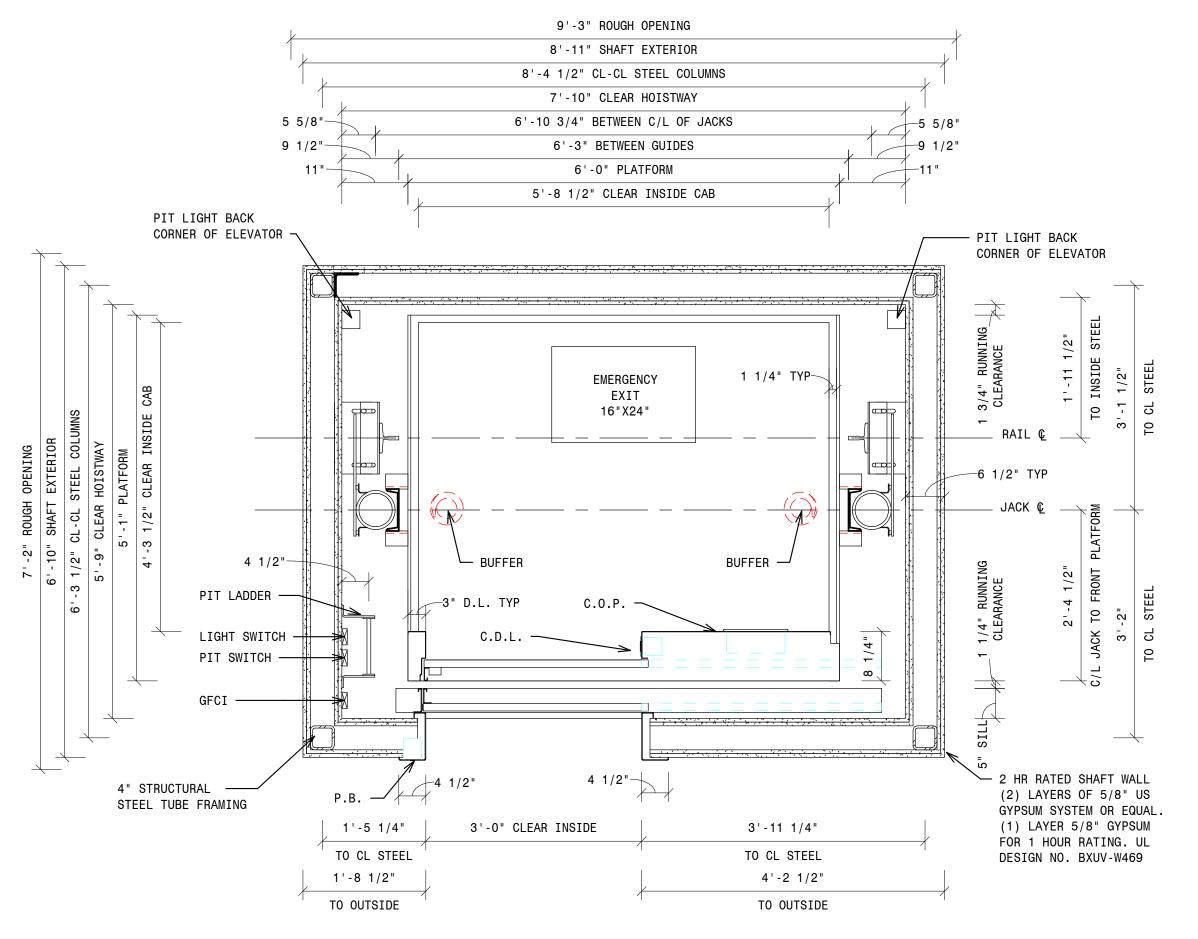

LAN AND

HYDRAULIC - PIT P HOISTWAY LAY

2309 AIRPARK DR.,

BURLINGTON, NC 27215 PHONE: (919)-903-0189 FAX: (336)-232-9789

Info@resoluteelevator.com www.ResoluteElevator.com NC Firm No. D-0476

OPENIN


王

LBS

100

N

- 2 - 2100 MRL HOISTWAY LEFT HAND 3/4" = 1'-0"

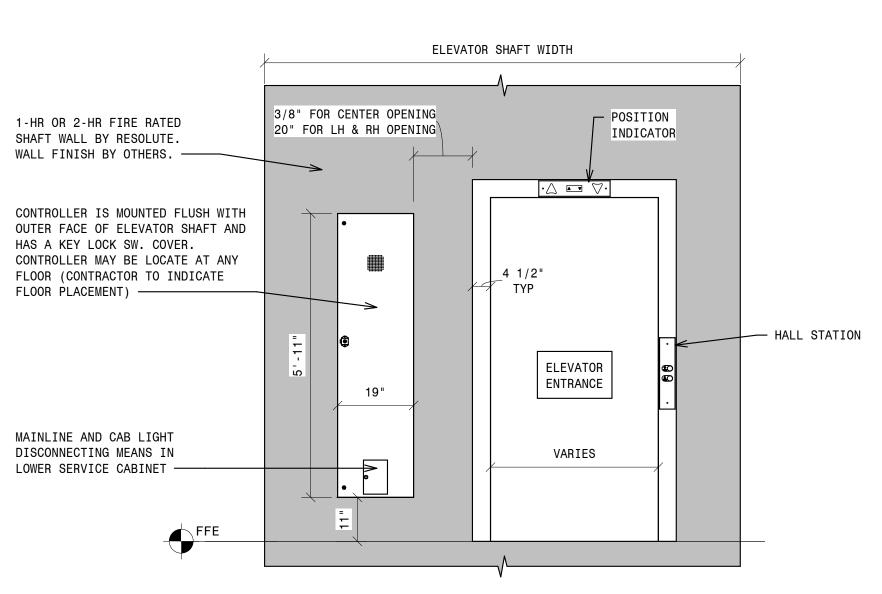

TYPICAL CONTROLLER LOCATION NOT TO SCALE