


- 2 - 2500 MRL HOISTWAY CENTER 3/4" = 1'-0"


4" STRUCTURAL —

STEEL TUBE FRAMING

PIT LIGHT BACK CORNER OF ELEVATOR -

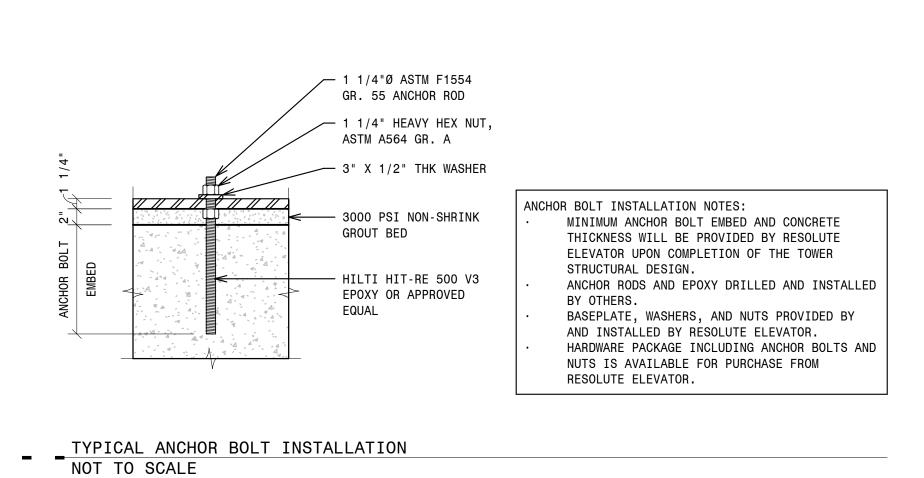

- 1 - 2500 MRL PIT CENTER 3/4" = 1'-0"

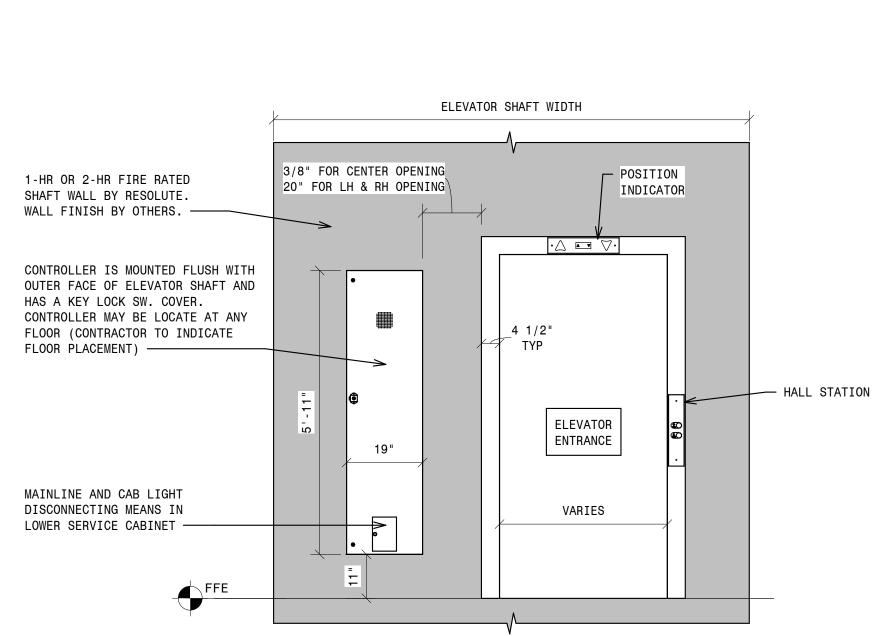

4 1/2"

2'-11 1/4"

TO CL STEEL

3'-2 1/2"

TO OUTSIDE

10'-3" ROUGH OPENING
9'-11" SHAFT EXTERIOR

9'-4 1/2" CL-CL STEEL COLUMNS

8'-10" CLEAR HOISTWAY

7'-10 3/4" BETWEEN C/L OF JACKS

7'-3" BETWEEN GUIDES

7'-0" PLATFORM

6'-8 1/2" CLEAR INSIDE CAB

**EMERGENCY** 

EXIT

3'-6"

CLEAR OPENING

1 1/4" TYP—

2'-11 1/4"

TO CL STEEL

3'-2 1/2"

TO OUTSIDE

BUFFER -

4 1/2"-

— PIT LIGHT BACK

CORNER OF ELEVATOR

— 2 HR RATED SHAFT WALL

(2) LAYERS OF 5/8" US

GYPSUM SYSTEM OR EQUAL.

(1) LAYER 5/8" GYPSUM

FOR 1 HOUR RATING. UL

DESIGN NO. BXUV-W469

LAN AND

HYDRAULIC - PIT HOISTWAY LA

2309 AIRPARK DR.,

BURLINGTON, NC 27215 PHONE: (919)-903-0189 FAX: (336)-232-9789

Info@resoluteelevator.com www.ResoluteElevator.com NC Firm No. D-0476

OP

 $\overline{\mathsf{O}}$ 

S

LB

2500

TYPICAL CONTROLLER LOCATION NOT TO SCALE