

4" STRUCTURAL —

STEEL TUBE FRAMING

PIT LIGHT BACK

CORNER OF ELEVATOR -

__ C.O.P.

4 1/2"


2'-11 1/4"

TO CL STEEL

3'-2 1/2"


TO OUTSIDE

TYPICAL CONTROLLER LOCATION NOT TO SCALE

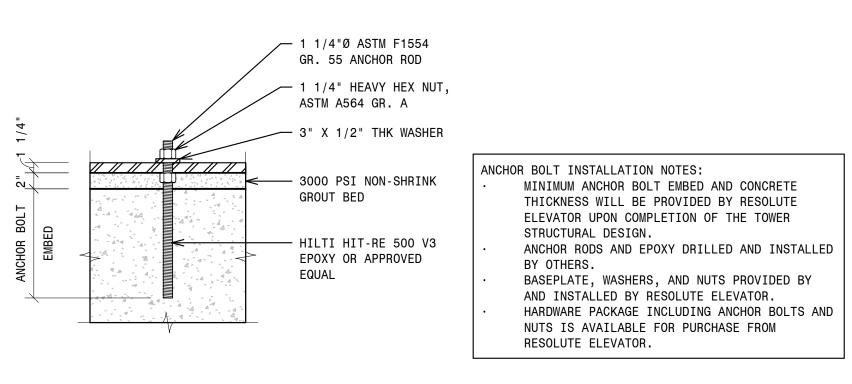

- TYPICAL ANCHOR BOLT INSTALLATION NOT TO SCALE

- 1 - 3500 MRL FR PIT CENTER 3/4" = 1'-0"

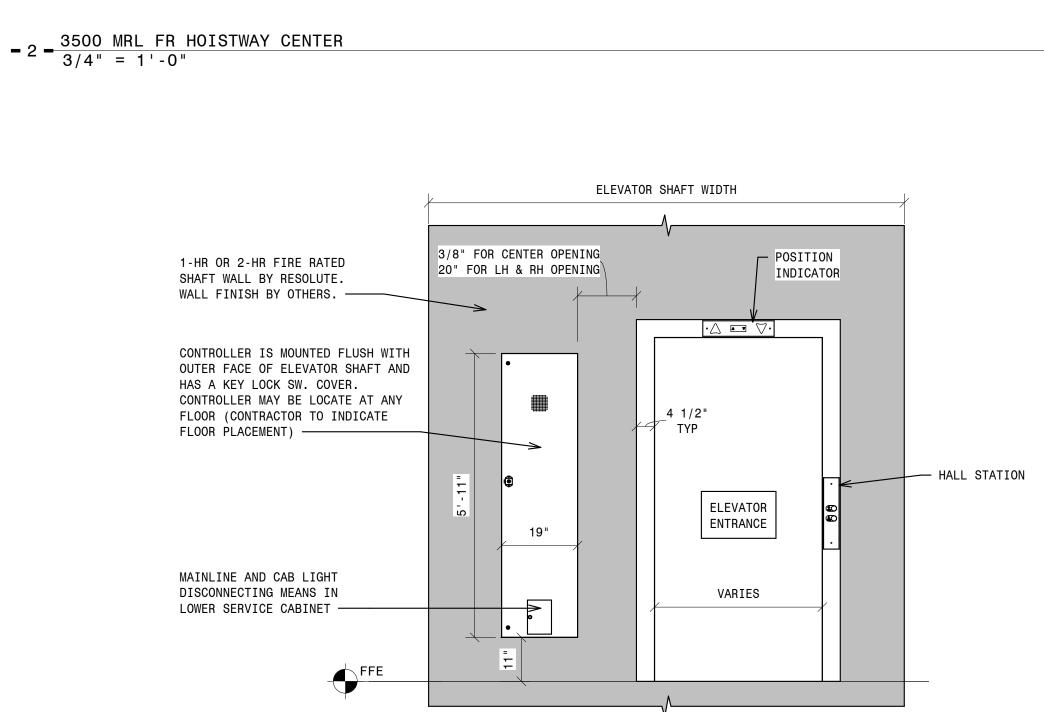

10'-3" ROUGH OPENING 9'-11" SHAFT EXTERIOR

9'-4 1/2" CL-CL STEEL COLUMNS

8'-10" CLEAR HOISTWAY 7'-10 3/4" BETWEEN C/L OF JACKS

7'-3" BETWEEN GUIDES

7'-0" PLATFORM 6'-8 1/2" CLEAR INSIDE CAB

3'-6"

CLEAR OPENING

EMERGENCY

EXIT 16"X24"

3'-6"

CLEAR OPENING

1 3/4" TYP

2'-11 1/4"

TO CL STEEL

3'-2 1/2"

TO OUTSIDE

BUFFER —

4 1/2"

PIT LIGHT BACK

— LIGHT SWITCH

- 2 HR RATED SHAFT WALL

(2) LAYERS OF 5/8" US

GYPSUM SYSTEM OR EQUAL.

(1) LAYER 5/8" GYPSUM

FOR 1 HOUR RATING. UL

DESIGN NO. BXUV-W469

CORNER OF ELEVATOR

HYDRAULIC - PIT HOISTWAY LA CENTER S LB 3500

2309 AIRPARK DR.,

BURLINGTON, NC 27215 PHONE: (919)-903-0189 FAX: (336)-232-9789

Info@resoluteelevator.com www.ResoluteElevator.com NC Firm No. D-0476

ං୪

FRONT

OPENING

LAN AND