



- 1 - 4500 MRL FR PIT RIGHT HAND
3/4" = 1'-0"

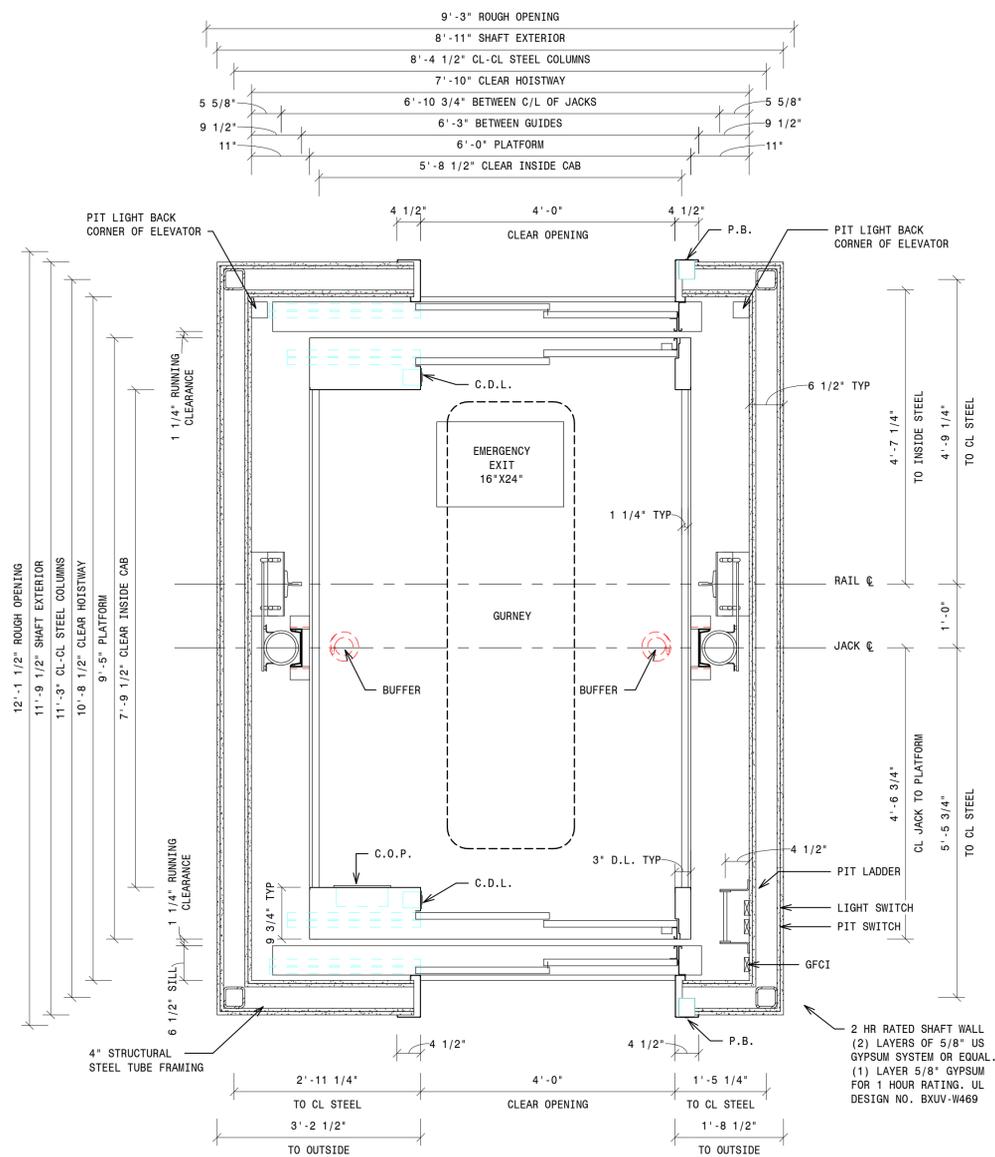


- 2 - 4500 MRL FR HOISTWAY RIGHT HAND
3/4" = 1'-0"

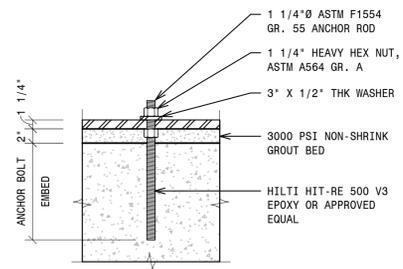

- TYPICAL ANCHOR BOLT INSTALLATION
NOT TO SCALE

ANCHOR BOLT INSTALLATION NOTES:

- MINIMUM ANCHOR BOLT EMBED AND CONCRETE THICKNESS WILL BE PROVIDED BY RESOLUTE ELEVATOR UPON COMPLETION OF THE TOWER STRUCTURAL DESIGN.
- ANCHOR RODS AND EPOXY DRILLED AND INSTALLED BY OTHERS.
- BASEPLATE, WASHERS, AND NUTS PROVIDED BY AND INSTALLED BY RESOLUTE ELEVATOR.
- HARDWARE PACKAGE INCLUDING ANCHOR BOLTS AND NUTS IS AVAILABLE FOR PURCHASE FROM RESOLUTE ELEVATOR.

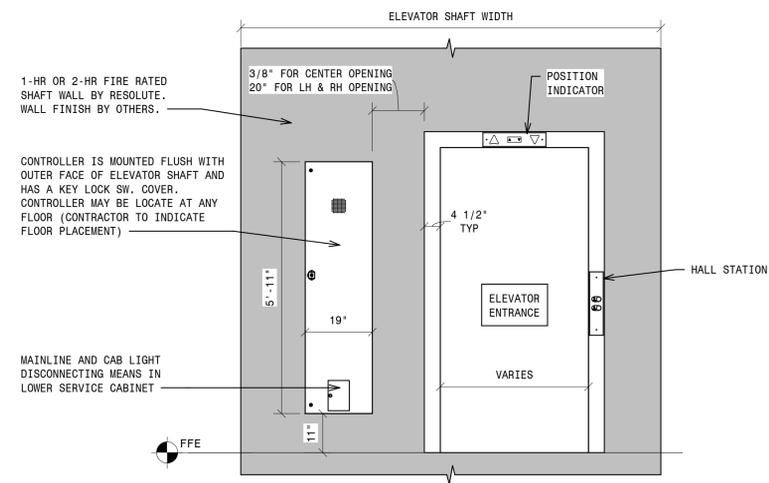

- TYPICAL CONTROLLER LOCATION
NOT TO SCALE

REVISIONS

ISSUE DATE: 10/8/2025

DES. BY: RES

CHKD. BY: NLH

RES

SCALE: As indicated

HYDRAULIC - PIT PLAN AND HOISTWAY LAYOUTS

4500 LBS RH OPENING - FRONT & REAR



2309 AIRPARK DR.
BURLINGTON, NC 27215
PHONE: (919)-903-0189
FAX: (336)-232-9789
Info@resoluteelevator.com
www.ResoluteElevator.com
NC Firm No. D-0476